




DC Voltmeters



YM-206NDV



YM-8NDV



LM-110NDV

Specifications

		Rectangular indicators						Wide-angle indicators			
		Y-2N Series			Y-N Series			L-N Series			
Size (width × height)	mm	64×60	85×75	100×85	82×82	102×102	122×122	80×80	110×110		
Model name		YM-206NDV	YM-208NDV	YM-210NDV	YM-8NDV	YM-10NDV	YM-12NDV	LM-80NDV	LM-110NDV		
Operation principle		Movable coil			Movable coil			Movable coil			
Accuracy (grade)		2.5			2.5			1.5	2.5		
Scale length	(mm)	55	70	85	70	90	100	124	175		
Weight	(kg)	0.07	0.1	0.1	0.1	0.15	0.3	0.3	0.4		
Indicator rating and delivery period classification	Maximum scale value	Accessory	Delivery period	Consumption current (approx.) (mA)							
	1, 3, 5V	—	○	1	1	1	1	1	1	1	1
	10, 15, 30V	—	○	1	1	1	1	1	1	1	1
	50, 100V	—	○	1	1	1	1	1	1	1	1
	150, 300V	—	○	1	1	1	1	1	1	1	1
	500, 600V	—	○	(1) Note 1	(1) Note 1	(1) Note 1	1	1	1	1	1
	750V	GR-2	○	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1
	1000V	multiplier	○	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1	(1) Note 1
	1200V	KR-1 3-terminal multiplier	○	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1
	1500V		○	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1
1800V	○		(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	
2000V	○		(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	(2) Note 1	
Page with outer dimensions drawing				35			36			37	

- Remarks**
- If, with a maximum scale of 600V or less, an externally mounted multiplier is desired, the voltmeter will be manufactured with the GR-2 multiplier as an accessory.
 - Indicators with both positive and negative readings on the scale can be manufactured if the larger of the left and right scales is 2000V or less.
The table above shows whether or not a multiplier is provided.
 - If a high sensitivity (high input resistance) indicator is desired as a DC voltmeter with a maximum scale of 100V or less, please specify the maximum scale and sensitivity current of the indicator.
Voltmeters can be manufactured with a sensitivity current within the range shown for DC ammeters on p.45.
There may be a maximum difference of approximately ±5% with respect to the value specified for the sensitivity current.
 - The GR-2 and KR-1 multipliers are dedicated accessories (non-compatible). They can only be used in combination with the indicators specified.
 - Please make sure to read the "Safety Precautions" (pp.5-8) and the "Selection Precautions" (p.9) to assist in selecting the model and use specifications suited to the application.

Note 1. These voltmeters do not have a JIS mark.

Delivery period classification

Symbol	◎Standard product	○Quasi-standard product	△Special product
Reference delivery period	Immediate delivery	Within 20 days	21 to 60 days

Connection diagrams

Fig. 1 DC voltmeter (direct)

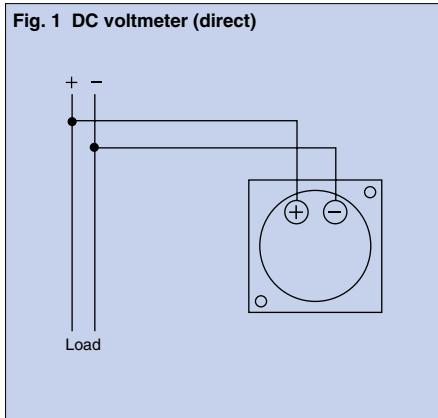


Fig. 2 DC voltmeter (with GR-2 multiplier)


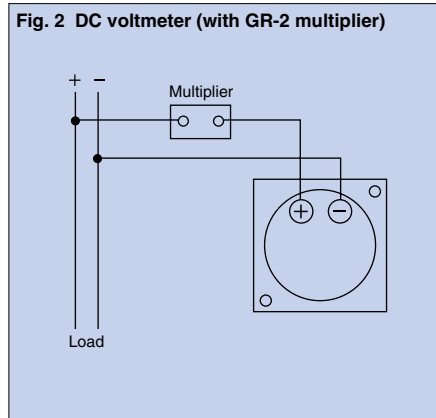




Fig. 3 DC voltmeter (with KR-1 3-terminal multiplier)

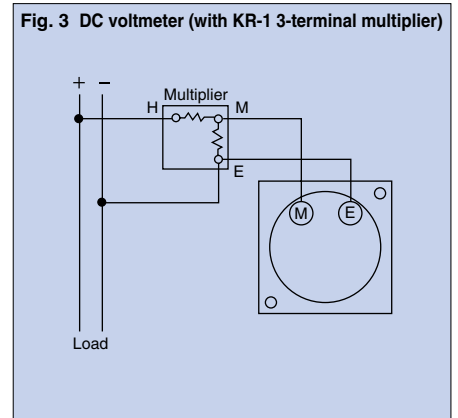

Dual-range indicators

Dual-range indicators with a maximum scale of 600V or less are manufactured with the GR-2 multiplier as an accessory.

[Example] In the case of a dual-range indicator with 0~150V and 0~75V indicator scales.

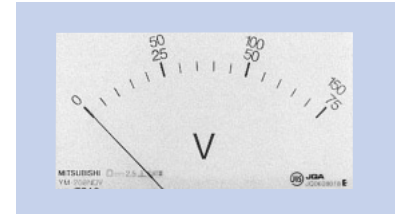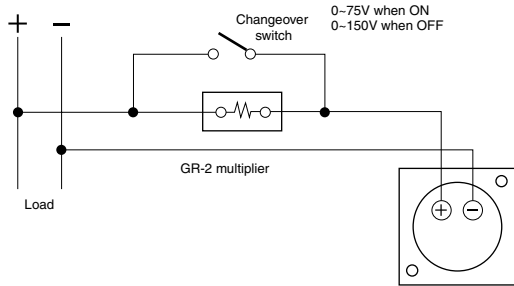

Example of double rating scale diagram (YM-208NDV)

Outer dimensions of the accessories

Fig. 1 GR-2 multiplier


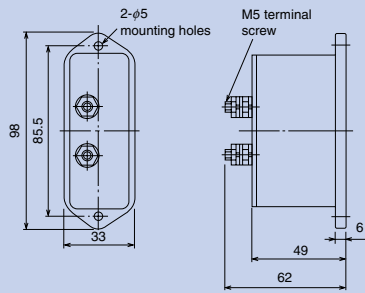


Fig. 3 KR-1 3-terminal multiplier




Ordering method

The items in must be specified.

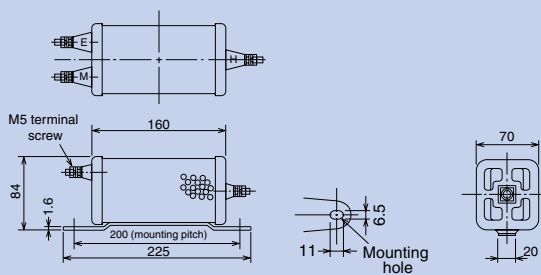

Rectangular indicators (Y-N Series)

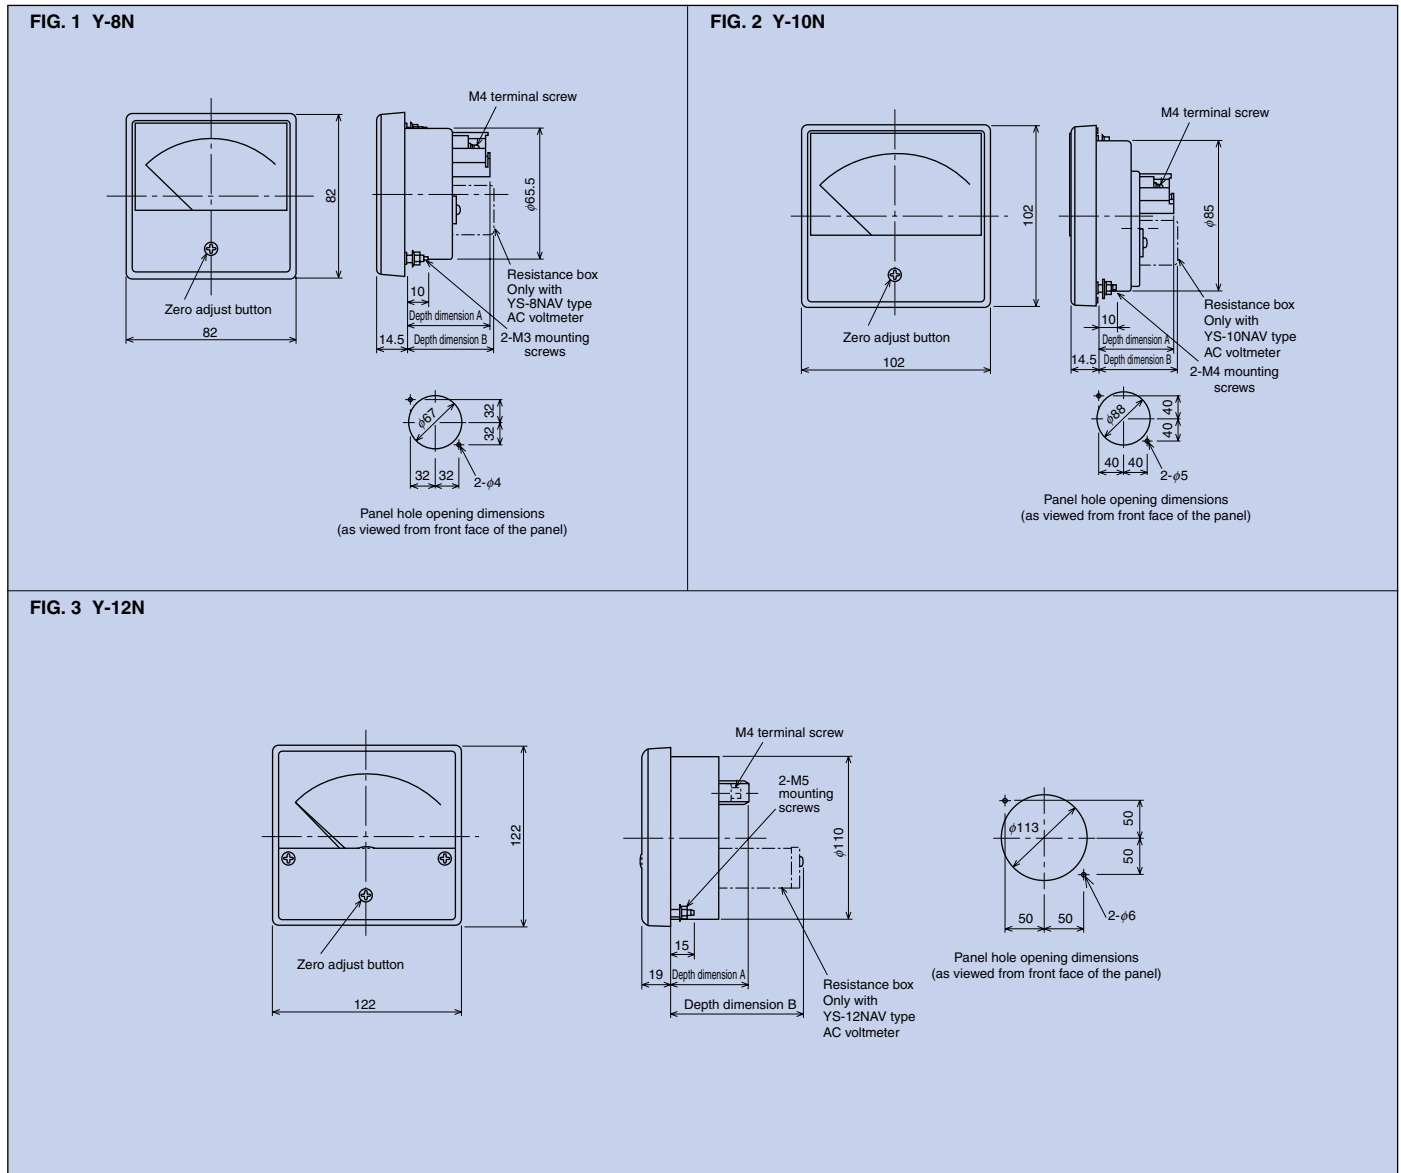

● Depth dimension details


Indicator type		Y-8N			Y-10N			Y-12N			
		Type name	A dimension	B dimension	Type name	A dimension	B dimension	Type name	A dimension	B dimension	
DC	Ammeters	YM-8NDA	41	—	YM-10NDA	41	—	YM-12NDA	50	—	
	Voltmeters	YM-8NDV	41	—	YM-10NDV	41	—	YM-12NDV	50	—	
AC	Ammeters	YS-8NAA	41	—	YS-10NAA	41	—	YS-12NAA	50	—	
		Uniform scale	YR-8NAA	41	—	YR-10NAA	41	—	YR-12NAA	50	—
	Voltmeters	YS-8NAV	41	43	YS-10NAV	41	43	YS-12NAV	50	85	
		Uniform scale	YR-8NAV	41	—	YR-10NAV	41	—	YR-12NAV	50	—
	Wattmeters	YP-8NW	41	—	YP-10NW	41	—	YP-12NW	100	—	
	Varmeters	YP-8NVAR	41	—	YP-10NVAR	41	—	YP-12NVAR	100	—	
	Power-factor meters	Balanced	YP-8NPF	81	—	YP-10NPF	81	—	YP-12NPF	50	Note
		Unbalanced	YP-8NPFU	41	—	YP-10NPFU	41	—	YP-12NPFU	100	—
Frequency meters	YP-8NF	81	—	YP-10NF	81	—	YP-12NF	50	—		
Receiving indicators	DC indicators	YM-8NRI	41	—	YM-10NRI	41	—	YM-12NRI	50	—	
	AC indicators	YR-8NRI	41	—	YR-10NRI	41	—	YR-12NRI	50	—	

Note. 100mm in the case of a model for 1-phase 2-wire systems.

Outer Dimension Drawings

(Refer to the specification tables regarding models other than the Y-2N series, Y-N series, and L-N series.)

Rectangular indicators (Y-2N Series)

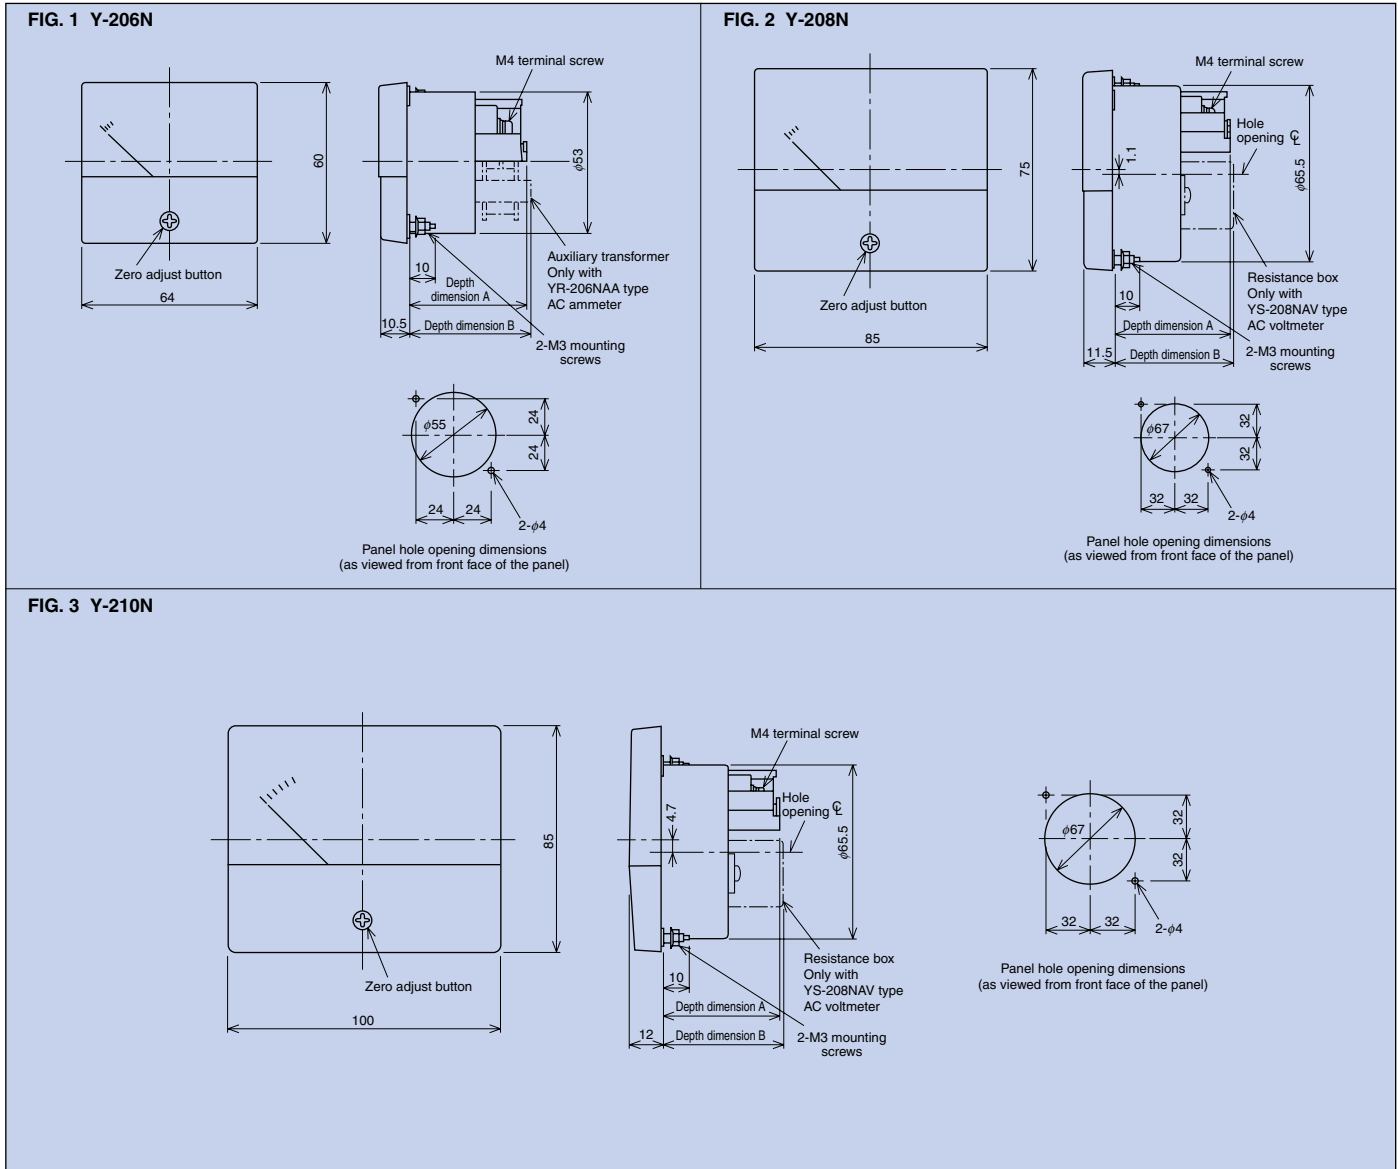

● Depth dimension details

Indicator type	Y-206N			Y-208N			Y-210N				
	Type name	A dimension	B dimension	Type name	A dimension	B dimension	Type name	A dimension	B dimension		
DC	Ammeters	YM-206NDA	43	—	YM-208NDA	43	—	YM-210NDA	43	—	
	Voltmeters	YM-206NDV	43	—	YM-208NDV	43	—	YM-210NDV	43	—	
AC	Ammeters	YS-206NAA	43	—	YS-208NAA	43	—	YS-210NAA	43	—	
		Uniform scale	YR-206NAA	43	44	YR-208NAA	43	—	YR-210NAA	43	—
	Voltmeters	YS-206NAV	43	—	YS-208NAV	43	45	YS-210NAV	43	45	
		Uniform scale	YR-206NAV	43	—	YR-208NAV	43	—	YR-210NAV	43	—
	Wattmeters	YP-206NW	43	—	YP-208NW	43	—	YP-210NW	43	—	
	Varmeters	YP-206NVAR	43	—	YP-208NVAR	43	—	YP-210NVAR	43	—	
	Power-factor meters	Balanced	YP-206NPF	43	—	YP-208NPF	43	—	YP-210NPF	43	—
		Unbalanced	YP-206NPFU	43	—	YP-208NPFU	43	—	YP-210NPFU	43	—
Frequency meters	YP-206NF	83	—	YP-208NF	83	—	YP-210NF	83	—		
Receiving indicators	DC indicators	YM-206NRI	43	—	YM-208NRI	43	—	YM-210NRI	43	—	
	AC indicators	YR-206NRI	43	—	YR-208NRI	43	—	YR-210NRI	43	—	




Outer Dimensional Drawings

(Refer to the specification tables regarding models other than the Y-2N series, Y-N series, and L-N series.)

Wide-angle indicators (L-N Series)


FIG. 1 L-80N

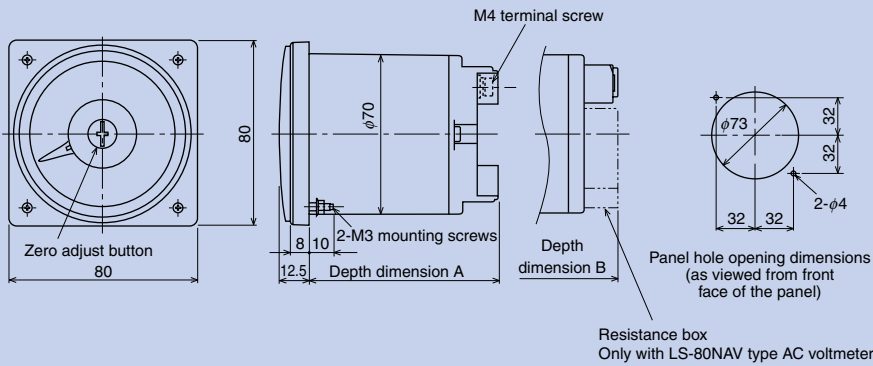

●Depth dimension details

Indicator type		L-80N			
		Type name	A dimension	B dimension	
DC	Ammeters	LM-80NDA	81	—	
	Voltmeters	LM-80NDV	81	—	
AC	Ammeters	LS-80NAA	—	81	
	Uniform scale	LR-80NAA	81	—	
	Voltmeters	LS-80NAV	—	81	
	Uniform scale	LR-80NAV	81	—	
	Wattmeters	LP-80NW	81	—	
	Varmeters	LP-80NVAR	81	—	
	Power-factor meters	Balanced	LP-80NPF	92	—
		Unbalance	LP-80NPFU	81	—
Frequency meters		LP-80NF	92	—	
Receiving indicators	DC indicators	LM-80NRI	81	—	
	AC indicators	LR-80NRI	81	—	



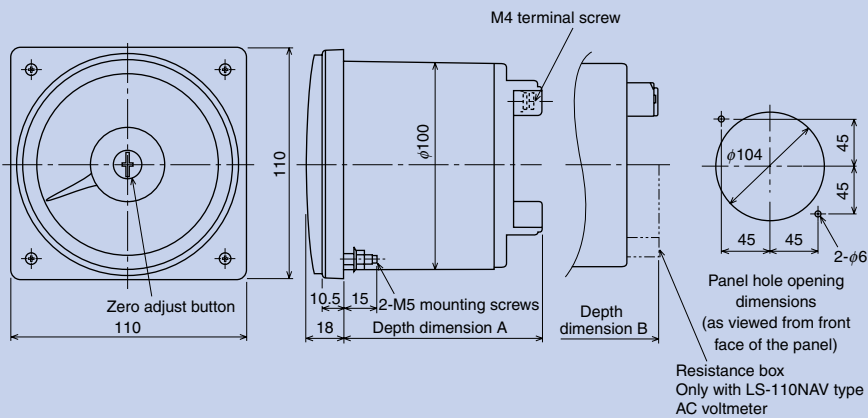








FIG. 2 L-110N



●Depth dimension details

Indicator type		L-110N			
		Type name	A dimension	B dimension	
DC	Ammeters	LM-110NDA	92	—	
	Voltmeters	LM-110NDV	92	—	
AC	Ammeters	LS-110NAA	—	92	
	Uniform scale	LR-110NAA	92	—	
	Voltmeters	LS-110NAV	—	92	
	Uniform scale	LR-110NAV	92	—	
	Wattmeters	LP-110NW	100	—	
	Varmeters	LP-110NVAR	100	—	
	Power-factor meters	Balanced	LP-110NPF	92	—
		Unbalance	LP-110NPFU	100	—
Frequency meters		LP-110NF	92	—	
Receiving indicators	DC indicators	LM-110NRI	92	—	
	AC indicators	LR-110NRI	92	—	

Covers

Cover specification	Classification	Y-2N Series	Y-N Series	L-N Series
B design cover (Munsell N 1.5 semi-gloss)	◎			
G design cover (all transparent)	○			—
F design cover ^{Note 1} (special color coating)	△			
Cover with red needle (can be manufactured for B, G, and F designs)	○			

Remarks The B design cover is standard specification. The G and F design covers and covers with red needles can be manufactured if required.

Note 1. When ordering the F-design cover, please use F as the cover code and specify the color coating. Munsell 7.5BG 4/1.5 will be used for orders with no color coating specified.

Cover codes

Cover specifications	Without red needle	With red needle
B design	B	BR*1
G design	G	GR
F design	F	FR

Remarks For the Y-N Series, a B cover with two red needles (BRR cover) can be manufactured depending on the model (please inquire for details).


Accessories

Nuts for mounting screws are provided with all models. T-150 and other special accessories are indicated in the specification columns of the respective indicator types.

Mechanical Indicators

Common Specifications

Scale plate components and items indicated

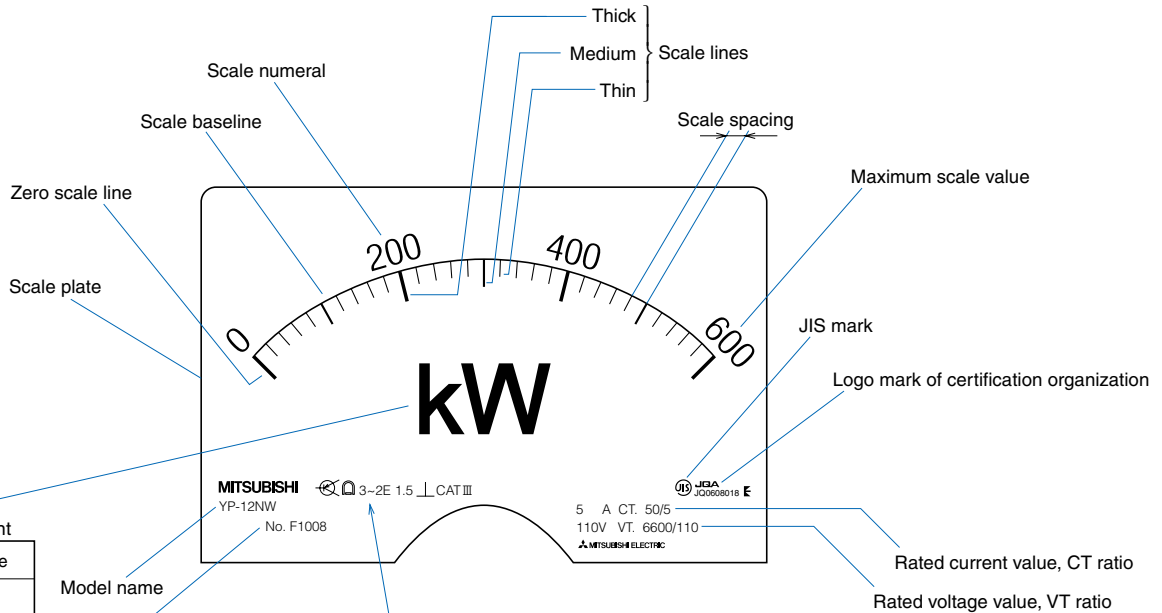

Unit of measurement

Item	Code
Ampere	A
Volt	V
Watt	W
Var	var
Power factor	cos ϕ or cos ψ
Hertz	Hz
Prefix	
Mega 10^6	M
Kilo 10^3	k
Milli 10^{-3}	m

Model name
Serial number

⊗ 3~2E 1.5 ⊥ CAT III

Auxiliary symbols

Item	Symbol
Shunt	
Serial resistor	
Accessory	

Operation principle

Item	Symbol
Permanent magnet/movable coil	
Movable iron core	
Bimetal	
Electronic device in measurement circuit	
Electronic device in auxiliary circuit	
Rectifier	

Type of measurement and number of elements measured

Item	Symbol
DC circuit	
AC circuit	
3-phase AC circuit	3~
Single element for 3-wire circuit	3-1E
Two elements for unbalanced load 3-wire circuit	3~2E
Two elements for unbalanced load 4-wire circuit	3N~2E
Three elements for unbalanced load 4-wire circuit	3N~3E

Accuracy class

Class index	Code
Class 0.5	0.5
Class 1	1
Class 1.5	1.5
Class 2.5	2.5
Class 5	5
Class 1.5 in the case where the base value corresponds to the span	1.5
Class 2.5 in the case where the base value corresponds to the span	2.5

Mounting attitude

Item	Symbol
Instrument used with scale plate set vertically	
Instrument used with scale plate set horizontally	
Instrument used with scale plate set at a position inclined from the horizontal surface (example: 60°)	

Measurement category

Classification	Code
Measurement category III	CAT III

Scale plate indications

The following tables show the scales, including numerals, colored lines, bands and colors, used as standard specifications. Red, blue, green and yellow are used for the colored lines/bands.

	Y-2N Series	Y-N Series	L-N Series
Standard scale			
Expanded scale (expanded by 3 times)			
Positive/Negative scale			
Single scale with double stamp			
Double scale with double stamp			
Colored lines Colored bands			

Remarks (1) See the "Standard Scale Diagrams" on pp.31 to 34 regarding the scale division with respect to the maximum scale value.
 (2) Special scales can also be manufactured.