Specifications

Series	Cable gland sizes	g	Housings without cable glands	matching collars	matching cable glands	Housings: Double looking system
			Part no.:	Part no.:	Part no.:	

Housings

Material:	Aluminum die cast
Surface:	Powder coated
Locking levers:	Plastic PA6
Housing gasket:	NBR
Temperature range:	- 40 °C up to + 125 °C (depending on cable gland)
Protection degree acc. to DIN EN 60 529:	IP 65 (in locked condition)

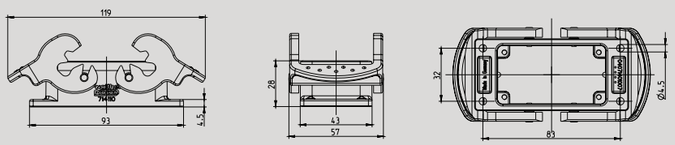

714110

Panel housing, aluminum,
height 28 mm
with double locking levers

Panel cutout
65 x 35 mm

B10
BB18
DD42
MOB10

10

103

714110

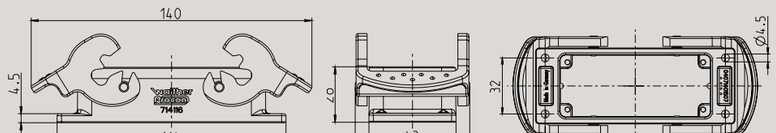

714116

Panel housing, aluminum,
height 28 mm
with double locking levers

Panel cutout
86 x 35 mm

B16
BA6
BB32
D40
DD72
MOB16

10

115

714116

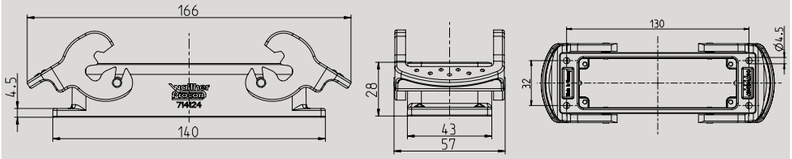

714124

Panel housing, aluminum,
height 28 mm
with double locking levers

Panel cutout
112 x 35 mm

B24
BB46
D64
DD108
MOB24

10

123

714124